


Selection Information: dimensions shown in millimeters

12 kV




Termination for crimp lug Screened single core plastic and rubber cable

Cross section (mm ²)	Kit number Indoor	Kit number Outdoor	Diameter over insulation HD 620 A2 (mm)
10 - 35	IXSU-F 3111	OXSU-F 3111	16.3
25 - 95	IXSU-F 3121	OXSU-F 3121	13.7 - 20.8
95 - 240	IXSU-F 3131	OXSU-F 3131	18.6 - 28.4
240 - 500	IXSU-F 3141	OXSU-F 3141	25.7 - 36.2
500 - 800	IXSU-F 3151	OXSU-F 3151	34.0 - 42.2
800 - 1200	IXSU-F 3161	OXSU-F 3161	39.5 - 50.0

Termination with mechanical lug BLMT Screened single core plastic and rubber cable

Cross section (mm ²)	Kit number Indoor	Kit number Outdoor	Diameter over insulation HD 620 A2 (mm)
25 - 35	IXSU-F3111-ML-1-13	OXSU-F3111-ML-1-13	13.7 - 16.3
	IXSU-F3111-ML-1-17	OXSU-F3111-ML-1-17	
25 - 95	IXSU-F3121-ML-1-13	OXSU-F3121-ML-1-13	13.7 - 20.8
	IXSU-F3121-ML-1-17	OXSU-F3121-ML-1-17	
95 - 240	IXSU-F3131-ML-4-13	OXSU-F3131-ML-4-13	18.6 - 28.4
	IXSU-F3131-ML-4-17	OXSU-F3131-ML-4-17	
120 - 300	IXSU-F3131-ML-5-13	OXSU-F3131-ML-5-13	20.1 - 30.4
	IXSU-F3131-ML-5-17	OXSU-F3131-ML-5-17	
185 - 400	IXSU-F3141-ML-6-13	OXSU-F3141-ML-6-13	23.2 - 33.6
	IXSU-F3141-ML-6-17	OXSU-F3141-ML-6-17	
500 - 630	IXSU-F3151-ML-7-17	OXSU-F3151-ML-7-17	34.4 - 40.0
	IXSU-F3151-ML-7-21	OXSU-F3151-ML-7-21	

12 kV

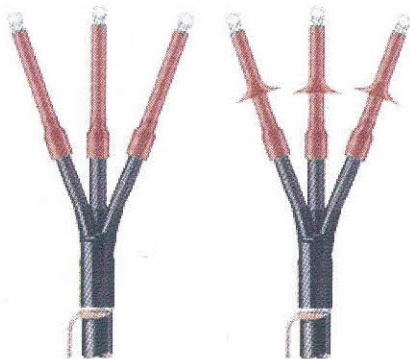


Termination for crimp lug Screened 3-core plastic and rubber cable without armour

Cross section (mm ²)	Tail Length (mm)	Kit number Indoor	Kit number Outdoor
10 - 16	450	IXSU-F 3301	OXSU-F 3301
	1200	IXSU-F 3304	OXSU-F 3304
16 - 35	450	IXSU-F 3311	OXSU-F 3311
	1200	IXSU-F 3314	OXSU-F 3314
25 - 70	450	IXSU-F 3321	OXSU-F 3321
	1200	IXSU-F 3324	OXSU-F 3324
95 - 240	450	IXSU-F 3331	OXSU-F 3331
	1200	IXSU-F 3334	OXSU-F 3334
240 - 500	450	IXSU-F 3341	OXSU-F 3341
	1200	IXSU-F 3344	OXSU-F 3344

Termination with mechanical lug BLMT Screened 3-core plastic and rubber cable without armour

Cross section (mm ²)	Tail Length (mm)	Kit number Indoor	Kit number Outdoor
25 - 35	450	IXSU-F3311-ML-1-13	OXSU-F3311-ML-1-13
		IXSU-F3311-ML-1-17	OXSU-F3311-ML-1-17
	1200	IXSU-F3314-ML-1-13	OXSU-F3314-ML-1-13
25 - 70	450	IXSU-F3321-ML-1-13	OXSU-F3321-ML-1-13
		IXSU-F3321-ML-1-17	OXSU-F3321-ML-1-17
	1200	IXSU-F3324-ML-1-13	OXSU-F3324-ML-1-13
95 - 240	450	IXSU-F3331-ML-4-13	OXSU-F3331-ML-4-13
		IXSU-F3331-ML-4-17	OXSU-F3331-ML-4-17
	1200	IXSU-F3334-ML-4-13	OXSU-F3334-ML-4-13
300 - 400	450	IXSU-F3341-ML-6-13	OXSU-F3341-ML-6-13
		IXSU-F3341-ML-6-17	OXSU-F3341-ML-6-17
	1200	IXSU-F3344-ML-6-13	OXSU-F3344-ML-6-13
		IXSU-F3344-ML-6-17	OXSU-F3344-ML-6-17
		IXSU-F3344-ML-6-21	OXSU-F3344-ML-6-21

24 kV

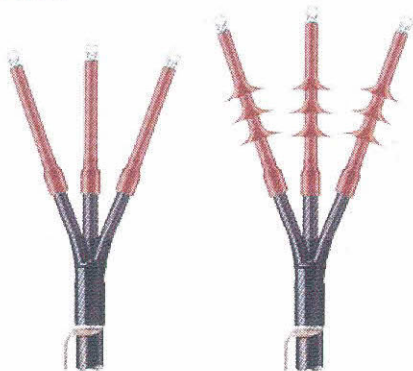

Termination for crimp lug Screened 3-core plastic and rubber cable without armour

Cross section (mm ²)	Tail Length (mm)	Kit number	
		Indoor	Outdoor
10 - 25	450	IXSU-F 5311	OXSU-F 5311
	1200	IXSU-F 5314	OXSU-F 5314
25 - 50	450	IXSU-F 5321	OXSU-F 5321
	1200	IXSU-F 5324	OXSU-F 5324
70 - 185	450	IXSU-F 5331	OXSU-F 5331
	1200	IXSU-F 5334	OXSU-F 5334
185 - 400	450	IXSU-F 5341	OXSU-F 5341
	1200	IXSU-F 5344	OXSU-F 5344

Termination with mechanical lug BLMT Screened 3-core plastic and rubber cable without armour

Cross-section (mm ²)	Tail Length (mm)	Kit number	
		Indoor	Outdoor
25 - 50	450	IXSU-F5321-ML-1-13	OXSU-F5321-ML-1-13
		IXSU-F5321-ML-1-17	OXSU-F5321-ML-1-17
	1200	IXSU-F5324-ML-1-13	OXSU-F5324-ML-1-13
IXSU-F5324-ML-1-17		OXSU-F5324-ML-1-17	
95 - 185	450	IXSU-F5331-ML-4-13	OXSU-F5331-ML-4-13
		IXSU-F5331-ML-4-17	OXSU-F5331-ML-4-17
	1200	IXSU-F5334-ML-4-13	OXSU-F5334-ML-4-13
IXSU-F5334-ML-4-17		OXSU-F5334-ML-4-17	
185 - 400	450	IXSU-F5341-ML-6-13	OXSU-F5341-ML-6-13
		IXSU-F5341-ML-6-17	OXSU-F5341-ML-6-17
		IXSU-F5341-ML-6-21	OXSU-F5341-ML-6-21
	1200	IXSU-F5344-ML-6-13	OXSU-F5344-ML-6-13
		IXSU-F5344-ML-6-17	OXSU-F5344-ML-6-17
		IXSU-F5344-ML-6-21	OXSU-F5344-ML-6-21