



U-LUG Copper Tubular Terminals & In-line Connectors

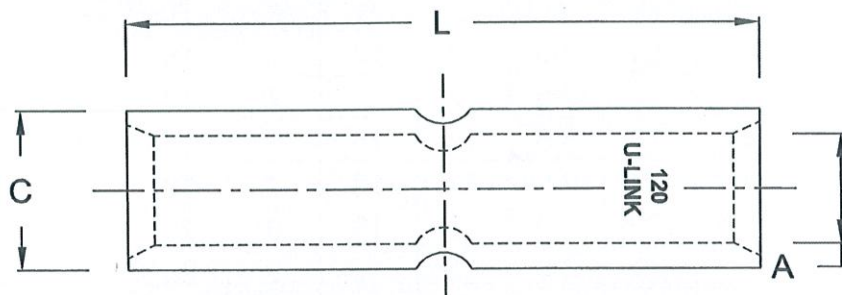


 CERTIFIED LISTED
 (UL Listed for use up to 35KV**)

SIZE	A	Tolr.	C	Tolr.	L	Tolr.
UCTL 1.5	1.8	+/- .06	3.7	+/- .08	15.0	+/- 0.8
UCTL 2.5	2.4	+/- .06	4	+/- .08	18.0	+/- 0.8
UCTL 4	3.1	+/- .06	4.8	+/- .08	19.0	+/- 0.8
UCTL 6	3.8	+/- .06	5.5	+/- .08	20.0	+/- 0.8
UCTL 10	4.5	+/- .06	6.2	+/- .08	23.0	+/- 0.8
UCTL 16	5.4	+/- .06	7.1	+/- .08	25.0	+/- 0.8
UCTL 20	6	+/- .06	7.7	+/- .08	35.0	+/- 0.8
UCTL 25	6.8	+/- .06	8.8	+/- .08	35.0	+/- 0.8
UCTL 35	8.2	+/- .06	10.6	+/- .08	38.0	+/- 0.8
UCTL 50	9.5	+/- .06	12.4	+/- .08	42.0	+/- 0.8
UCTL 70	11.2	+/- .08	14.7	+/- .1	47.0	+/- 1.0
UCTL 95	13.5	+/- .08	17.4	+/- .1	47.0	+/- 1.0
UCTL 120	15	+/- .08	19.4	+/- .1	65.0	+/- 1.0
UCTL 150	16.5	+/- .08	21.2	+/- .1	65.0	+/- 1.0
UCTL 185	18.5	+/- .08	23.5	+/- .1	67.0	+/- 1.0
UCTL 240	21	+/- .1	26.5	+/- .12	80.0	+/- 1.0
UCTL 300	23.5	+/- .1	30	+/- .12	89.0	+/- 1.5
UCTL 400	26.8	+/- .1	34.8	+/- .12	100.0	+/- 1.5
UCTL 500	30	+/- .1	39	+/- .12	115.0	+/- 1.5
UCTL 630	35	+/- .1	45	+/- .12	115.0	+/- 1.5
UCTL 800	39	+/- .1	50.6	+/- .12	230.0	+/- 2.0
UCTL 1000	43	+/- .1	56.2	+/- .12	230.0	+/- 2.0