


Polyester Standard Enclosures

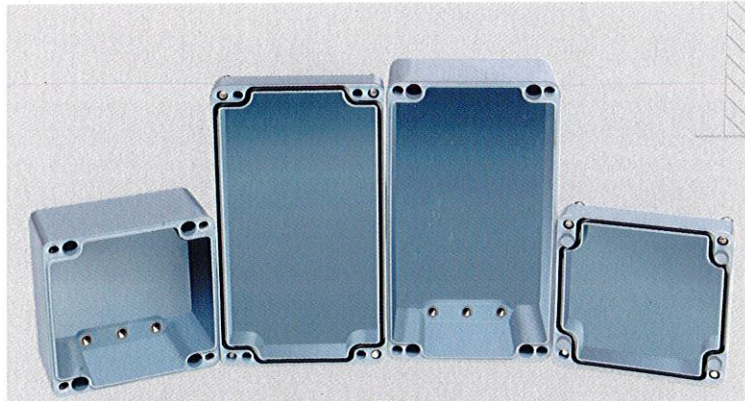

Technical Data Sheet :

Color:	Similar to RAL 7000, Grey/Black
Ingress protection:	IP 66 to EN 60529
Impact resistance:	>7 Joule, EN 50014
Temperature range:	(silicone) seal : -50°C to +135°C
Surface resistance:	>1012 Ohm
Flammability:	V0 / self-extinguishing, UL 94
Dielectric strength:	18 KV / mm
Toxicity:	free from halogen

Model No	Size			Din rail		Mounting plate	Allen lid screw	Sealable lid screw	External Mounting Bracket	External Hinge
	L	B	H	TS 15	TS 35					
GRJ01	80	75	55	YES	NO	YES	YES	YES	YES	YES
GRJ02	110	75	55	YES	NO	YES	YES	YES	YES	YES
GRJ03	122	120	90	NO	NO	YES	YES	YES	YES	YES
GRJ05	160	75	55	YES	NO	YES	YES	YES	YES	YES
GRJ06	160	75	75	YES	NO	YES	YES	YES	YES	YES
GRJ07	160	160	90	NO	YES	YES	YES	YES	YES	YES
GRJ09	190	75	55	YES	NO	YES	YES	YES	YES	YES
GRJ11	220	120	90	NO	YES	YES	YES	YES	YES	YES
GRJ12	255	250	120	NO	YES	YES	YES	YES	YES	YES
GRJ13	260	160	90	NO	YES	YES	YES	YES	YES	YES
GRJ14	360	160	90	NO	YES	YES	YES	YES	YES	YES
GRJ15	400	250	120	NO	YES	YES	YES	YES	YES	YES
GRJ16	400	405	120	NO	YES	YES	YES	YES	YES	YES