

Accessories

SERRATED WASHER / TEETH WASHER(OSTW)

Application

Outdoor or indoor use. For use on cable gland entry threads.

Function


To dampen vibrations of the cable gland / equipment assembly which may loosen the cable gland or lock nut.

Material

Stainless Steel

Teeth Washer Ordering (Part No/Thread size)

e.g. OSTW-M20
OSTW NPT 1/2"

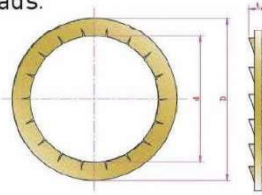

.Metric Thread				NPT Thread			
SIZE	D	d	t	SIZE	D	d	t
OSTW-M16	25.5	16.5	2	OSTW-1/2"	34.8	23.6	2
OSTW-M20	31.5	21.3	2.5	OSTW-3/4"	40.3	27.8	2.5
OSTW-M25	37.5	25.2	2.5	OSTW-1"	48.0	33.5	3
OSTW-M32	48.0	33.5	3	OSTW-1-1/4"	55.8	42.8	2.5
OSTW-M40	55.5	40.0	3	OSTW-1-1/2"	75.8	52.0	3.5
OSTW-M50	75.5	52.0	3.5	OSTW-2"	89.7	65.2	3.5
OSTW-M63	89.5	65.0	3.5	OSTW-2-1/2"	97.5	77.0	4
OSTW-M75	97.5	77.0	4	OSTW-3"	112.0	90.0	4
OSTW-M90	112.0	90.0	4	OSTW-3-1/2"	120.0	102.0	4
OSTW-M100	120.0	102.0	4	OSTW-4"	135.0	112.0	4

* All dimensions in millimeters.


LEAD SHEATH WASHER (OSLS)

Material

Nickel plated Brass

Lead Sheath Ordering (Part No/Thread size)

e.g. OSLS-M16
OSLS-M20

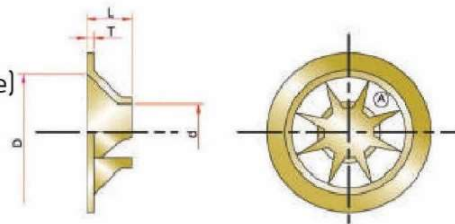

Norminal Type	D	d	L	T	A
OSLS-M16	10	6	3.5	0.2	8
OSLS-M20	14	6	4.5	0.35	8
OSLS-M25	18	11	7.0	0.35	8
OSLS-M32	25	16	10.5	0.35	8
OSLS-M40	31	21	12	0.5	10
OSLS-M50	40	27	13	0.5	10
OSLS-M63	53	38	16	0.5	12
OSLS-M75	61	47	18	0.5	12
OSLS-M90	70	57	18	0.6	12
OSLS-M100	83	64	19	0.7	12

* All dimensions in millimeters.