


LADDER TYPE CABLE TIES UNCOATED / COATED

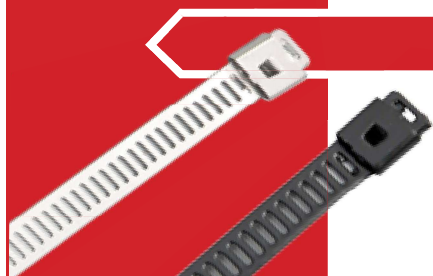

Technical information:

Material	: A) 316 grade non-magnetic stainless steel B) 304 grade non-magnetic stainless steel
Temperature Range	: -60°C to +300°C (Uncoated) -60°C to +150°C (Coated)
Surface Finish	: Metallic (Uncoated) Pure Polyester Coating (Coated)
Flamability Rating	: UL94 fireproof, Halogen free and UV-resistant

Ladder Type - Uncoated - 7mm width

Part No. for Stainless Steel Grade		Width		Length		Thickness		Max Diameter Single Loop		Minimum Loop Tensile Strength		Package Quantity
SS304	SS316	In	mm	In	mm	In	mm	In	mm	N	lbs	
LU74-150	LU76-150	0.28	7.0	6	150	0.012	0.30	1.3	34	445	100	100/bag
LU74-200	LU76-200	0.28	7.0	8	200	0.012	0.30	2.0	50	445	100	100/bag
LU74-225	LU76-225	0.28	7.0	9	225	0.012	0.30	2.3	58	445	100	100/bag
LU74-250	LU76-250	0.28	7.0	10	250	0.012	0.30	2.6	66	445	100	100/bag
LU74-300	LU76-300	0.28	7.0	12	300	0.012	0.30	3.1	80	445	100	100/bag
LU74-360	LU76-360	0.28	7.0	14	360	0.012	0.30	3.9	99	445	100	100/bag
LU74-450	LU76-450	0.28	7.0	18	450	0.012	0.30	5.0	128	445	100	100/bag
LU74-600	LU76-600	0.28	7.0	24	600	0.012	0.30	6.9	176	445	100	100/bag
LU74-610	LU76-610	0.28	7.0	24	610	0.012	0.30	7.0	179	445	100	100/bag
LU74-750	LU76-750	0.28	7.0	30	750	0.012	0.30	8.8	224	445	100	100/bag
LU74-1000	LU76-1000	0.28	7.0	39	1000	0.012	0.30	11.9	303	445	100	100/bag

Ladder Type - Uncoated - 12mm width

LU124-150	LU126-150	0.47	12.0	6	150	0.012	0.30	1.3	34	1112	250	100/bag
LU124-200	LU126-200	0.47	12.0	8	200	0.012	0.30	2.0	50	1112	250	100/bag
LU124-225	LU126-225	0.47	12.0	9	225	0.012	0.30	2.3	58	1112	250	100/bag
LU124-250	LU126-250	0.47	12.0	10	250	0.012	0.30	2.6	66	1112	250	100/bag
LU124-300	LU126-300	0.47	12.0	12	300	0.012	0.30	3.1	80	1112	250	100/bag
LU124-360	LU126-360	0.47	12.0	14	360	0.012	0.30	3.9	99	1112	250	100/bag
LU124-450	LU126-450	0.47	12.0	18	450	0.012	0.30	5.0	128	1112	250	100/bag
LU124-600	LU126-600	0.47	12.0	24	600	0.012	0.30	6.9	176	1112	250	100/bag
LU124-610	LU126-610	0.47	12.0	24	610	0.012	0.30	7.0	179	1112	250	100/bag
LU124-750	LU126-750	0.47	12.0	30	750	0.012	0.30	8.8	224	1112	250	100/bag
LU124-1000	LU126-1000	0.47	12.0	39	1000	0.012	0.30	11.9	303	1112	250	100/bag

Ladder Type - Coated - 7mm width

LC74-150	LC76-150	0.28	7.0	6	150	0.012	0.30	1.3	34	445	100	100/bag
LC74-200	LC76-200	0.28	7.0	8	200	0.012	0.30	2.0	50	445	100	100/bag
LC74-225	LC76-225	0.28	7.0	9	225	0.012	0.30	2.3	58	445	100	100/bag
LC74-250	LC76-250	0.28	7.0	10	250	0.012	0.30	3.6	66	445	100	100/bag
LC74-300	LC76-300	0.28	7.0	12	300	0.012	0.30	3.1	80	445	100	100/bag
LC74-360	LC76-360	0.28	7.0	14	360	0.012	0.30	3.9	99	445	100	100/bag
LC74-450	LC76-450	0.28	7.0	18	450	0.012	0.30	5.0	128	445	100	100/bag
LC74-600	LC76-600	0.28	7.0	24	600	0.012	0.30	6.9	176	445	100	100/bag
LC74-610	LC76-610	0.28	7.0	24	610	0.012	0.30	7.0	179	445	100	100/bag
LC74-750	LC76-750	0.28	7.0	30	750	0.012	0.30	8.8	224	445	100	100/bag
LC74-1000	LC76-1000	0.28	7.0	39	1000	0.012	0.30	11.9	303	445	100	100/bag

Ladder Type - Coated - 12mm width

LC124-150	LC126-150	0.47	12.0	6	150	0.012	0.30	1.3	34	1112	250	100/bag
LC124-200	LC126-200	0.47	12.0	8	200	0.012	0.30	2.0	50	1112	250	100/bag
LC124-225	LC126-225	0.47	12.0	9	225	0.012	0.30	2.3	58	1112	250	100/bag
LC124-250	LC126-250	0.47	12.0	10	250	0.012	0.30	3.6	66	1112	250	100/bag
LC124-300	LC126-300	0.47	12.0	12	300	0.012	0.30	3.1	80	1112	250	100/bag
LC124-360	LC126-360	0.47	12.0	14	360	0.012	0.30	3.9	99	1112	250	100/bag
LC124-450	LC126-450	0.47	12.0	18	450	0.012	0.30	5.0	128	1112	250	100/bag
LC124-600	LC126-600	0.47	12.0	24	600	0.012	0.30	6.9	176	1112	250	100/bag
LC124-610	LC126-610	0.47	12.0	24	610	0.012	0.30	7.0	179	1112	250	100/bag
LC124-750	LC126-750	0.47	12.0	30	750	0.012	0.30	8.8	224	1112	250	100/bag
LC124-1000	LC126-1000	0.47	12.0	39	1000	0.012	0.30	11.9	303	1112	250	100/bag