


## Copper Tubular Terminals & In-line Connectors

- 1) FINISH = ELECTRO TINNED
- 2) MATERIAL : E-COPPER

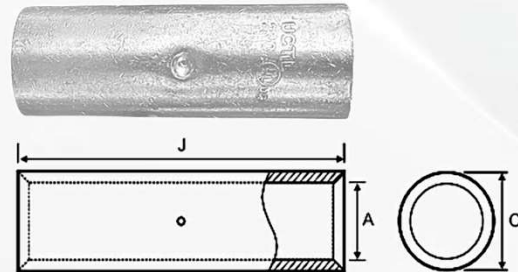

| SIZE      | A    | Tolr.   | C    | Tolr.   | J     | Tolr.   |
|-----------|------|---------|------|---------|-------|---------|
| UCTL 1.5  | 1.8  | +/- .06 | 3.7  | +/- .08 | 15.0  | +/- .08 |
| UCTL 2.5  | 2.4  | +/- .06 | 4.0  | +/- .08 | 18.0  | +/- .08 |
| UCTL 4    | 3.1  | +/- .06 | 4.8  | +/- .08 | 19.0  | +/- .08 |
| UCTL 6    | 3.8  | +/- .06 | 5.5  | +/- .08 | 20.0  | +/- .08 |
| UCTL 10   | 4.5  | +/- .06 | 6.2  | +/- .08 | 23.0  | +/- .08 |
| UCTL 16   | 5.4  | +/- .06 | 7.1  | +/- .08 | 25.0  | +/- .08 |
| UCTL 25   | 6.8  | +/- .06 | 8.8  | +/- .08 | 35.0  | +/- .08 |
| UCTL 35   | 8.2  | +/- .06 | 10.6 | +/- .08 | 38.0  | +/- .08 |
| UCTL 50   | 9.5  | +/- .06 | 12.4 | +/- .08 | 42.0  | +/- .08 |
| UCTL 70   | 11.2 | +/- .08 | 14.7 | +/- .10 | 47.0  | +/- 1.0 |
| UCTL 95   | 13.5 | +/- .08 | 17.4 | +/- .10 | 47.0  | +/- 1.0 |
| UCTL 120  | 15.0 | +/- .08 | 19.4 | +/- .10 | 65.0  | +/- 1.0 |
| UCTL 150  | 16.5 | +/- .08 | 21.2 | +/- .10 | 65.0  | +/- 1.0 |
| UCTL 185  | 18.5 | +/- .08 | 23.5 | +/- .10 | 67.0  | +/- 1.0 |
| UCTL 240  | 21.0 | +/- .10 | 26.5 | +/- .12 | 80.0  | +/- 1.0 |
| UCTL 300  | 23.5 | +/- .10 | 30.0 | +/- .12 | 89.0  | +/- 1.5 |
| UCTL 400  | 26.8 | +/- .10 | 34.8 | +/- .12 | 100.0 | +/- 1.5 |
| UCTL 500  | 30.0 | +/- .10 | 39.0 | +/- .12 | 115.0 | +/- 1.5 |
| UCTL 630  | 35.0 | +/- .10 | 45.0 | +/- .12 | 115.0 | +/- 1.5 |
| UCTL 800  | 39.0 | +/- .10 | 50.6 | +/- .12 | 230.0 | +/- 2.0 |
| UCTL 1000 | 43.0 | +/- .10 | 56.2 | +/- .12 | 230.0 | +/- 2.0 |