

U-GLAND - A2 Type


STANDARD

B.S.6121 PART - 1 : 1989

IP Rating : IP 66

APPLICATION

INDUSTRIAL GLAND For use with all types of unarmoured cable for Indoor and Outdoor.

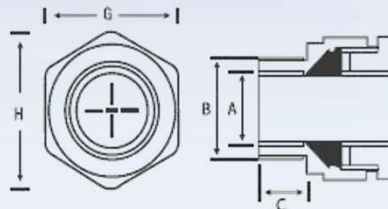

Material : Brass / Nickel Plated

All Dimensions Are Millimetre

GLAND SIZE	DIA. B	MINIMUM LGTH. OF THREAD C	DIAMETER (MAX) - (MIN) A	ACROSS FLAT G	ACROSS CORNER H
A2 16	16	15	8.00 - 3.50	22.0	24.5
A2 20 S	20	15	10.80 - 8.00	22.0	24.5
A2 20 L	20	15	14.70 - 11.00	24.0	26.5
A2 25 S	25	15	16.00 - 12.00	28.0	32.0
A2 25 L	25	15	20.30 - 13.00	30.0	33.5
A2 32 S	32	15	23.00 - 16.50	37.5	41.5
A2 32 L	32	15	26.20 - 19.00	40.5	45.0
A2 40 S	40	20	29.00 - 23.00	45.0	50.0
A2 40 L	40	20	34.00 - 26.00	46.0	51.0
A2 45	45	20	38.00 - 30.00	55.0	60.5
A2 50 S	50	20	41.00 - 32.00	58.5	64.5
A2 50 L	50	20	45.00 - 36.00	62.7	66.5
A2 63 S	63	20	50.80 - 43.00	69.5	77.0
A2 63 L	63	20	56.50 - 48.00	74.5	83.0
A2 75 S	75	20	62.00 - 55.00	83.5	93.0
A2 75 L	75	20	68.50 - 61.00	89.5	100.0
A2 90	90	20	80.00 - 67.00	101.5	114.0
A2 100	100	24	90.00 - 86.00	112.0	124.0
A2 110	110	24	100.00 - 96.00	123.5	139.5