


U-LUG

Copper Tubular Terminals & In-line Connectors

- 1) FINISH = ELECTRO TINNED
- 2) MATERIAL : E-COPPER

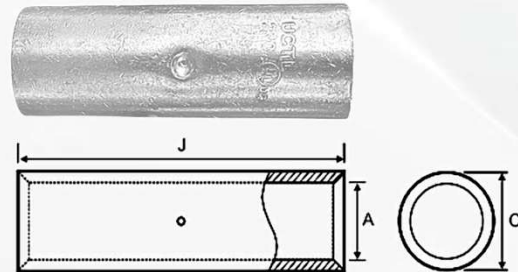

SIZE	(EQUIVALENT AREA AWG)	A	Tolr.	C	Tolr.	J	Tolr.
UCTL 1.5	16 AWG	1.8	+/- .06	3.7	+/- .08	15.0	+/- .08
UCTL 2.5	14 AWG	2.4	+/- .06	4.0	+/- .08	18.0	+/- .08
UCTL 4	12 AWG	3.1	+/- .06	4.8	+/- .08	19.0	+/- .08
UCTL 6	10 AWG	3.8	+/- .06	5.5	+/- .08	20.0	+/- .08
UCTL 10	8 AWG	4.5	+/- .06	6.2	+/- .08	23.0	+/- .08
UCTL 16	6 AWG	5.4	+/- .06	7.1	+/- .08	25.0	+/- .08
UCTL 25	4 AWG	6.8	+/- .06	8.8	+/- .08	35.0	+/- .08
UCTL 35	2 AWG	8.2	+/- .06	10.6	+/- .08	38.0	+/- .08
UCTL 50	1/0 AWG	9.5	+/- .06	12.4	+/- .08	42.0	+/- .08
UCTL 70	2/0 AWG	11.2	+/- .08	14.7	+/- .10	47.0	+/- 1.0
UCTL 95	3/0 AWG	13.5	+/- .08	17.4	+/- .10	47.0	+/- 1.0
UCTL 120	4/0 AWG	15.0	+/- .08	19.4	+/- .10	65.0	+/- 1.0
UCTL 150	300 MCM	16.5	+/- .08	21.2	+/- .10	65.0	+/- 1.0
UCTL 185	350 MCM	18.5	+/- .08	23.5	+/- .10	67.0	+/- 1.0
UCTL 240	450 MCM	21.0	+/- .10	26.5	+/- .12	80.0	+/- 1.0
UCTL 300	600 MCM	23.5	+/- .10	30.0	+/- .12	89.0	+/- 1.5
UCTL 400	750 MCM	26.8	+/- .10	34.8	+/- .12	100.0	+/- 1.5
UCTL 500	1000 MCM	30.0	+/- .10	39.0	+/- .12	115.0	+/- 1.5
UCTL 630	1200 MCM	35.0	+/- .10	45.0	+/- .12	115.0	+/- 1.5
UCTL 800	1500 MCM	39.0	+/- .10	50.6	+/- .12	230.0	+/- 2.0
UCTL 1000	2000 MCM	43.0	+/- .10	56.2	+/- .12	230.0	+/- 2.0