

Hydraulic Compression Tools

MODEL No.

15B

T-11 to T-122 Izumi C-Connectors


SPECIFICATIONS

Two stage Pumping

Reservoir : 83 cc
capacity

Ram stroke : 15 mm

Force at die face: 59 kN

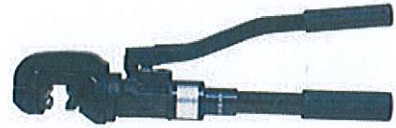

SIZE

465 (L) mm

WEIGHT

3.0 kg

ACCESSORIES

T-20, T-26, T-44, T-60, T-76, T-98, T-122 dies

Double molded carrying case

REMARKS

Dies for smaller size connectors and non-insulated terminals available.

- * Two stage pumping action for rapid ram advance
 - * Rubber C head cover for protection of accidental flash over
 - * Fiberglass handle (Body handle)
 - * Rubber protected pump handle
 - * 180 degree swivel head
 - * Optional dies :
 - 1 Dies for C-Connectors T-11 and T-16
 - 2 Dies for non-insulated terminals
- Indentors : 8-14, 22-60m m²
Nest : 8, 14, 22, 38, 60m m²

FEATURES

The 15B hand hydraulic tool was designed to accommodate compressing Izumi C-Connectors up to T-122.

Light weight, slim design allows installation of C-Connectors in tight quarters.

Two stage pumping system minimizes pumping operation.

Rubber protected C Head and pump handle as well as fiberglass handle protect from accidental flash over.